

1- Measure the thickness of the door and check door handing



Screw length	Door thickness ±1/16"
1-7/8"	1-1/2"
2-1/8"	1-3/4"




2- Assemble the handles to escutcheons

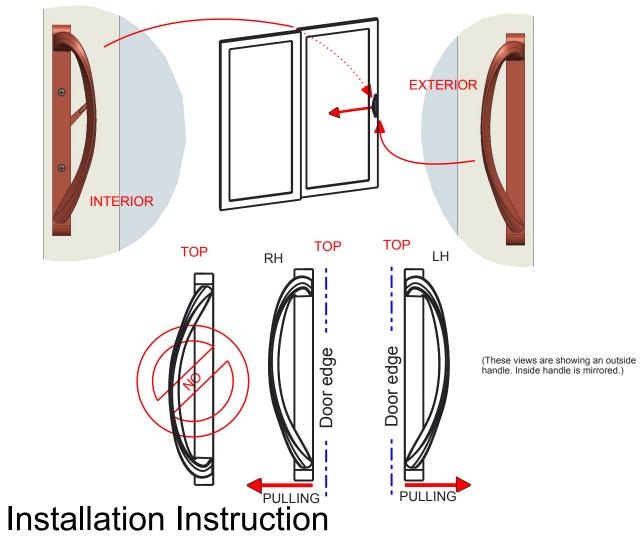

Fasten the handles to escutcheons with the 1/2" long #10-24 screws.


Kindly ensure to orient the handle as shown


The handle pulling direction is toward the glass (center of the door).

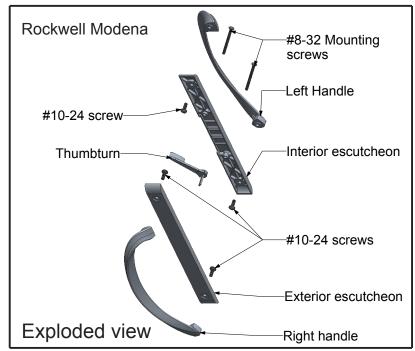

- 3- A) Insert the thumbturn into the lock drive hub.
 B) Place the interior handle and hold it. Place the exterior handle and hold it.
- C) Fasten with the #8-32 screws identified at step 1, through the interior handle.

Do not overtigthen the screws.



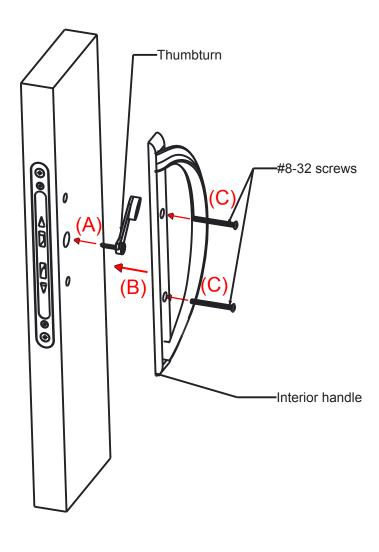

Installation Instruction

Rockwell Security Inc.

www.rockwellsecurityinc.com